
Trenchers

TR36B | TR48B | TR60B



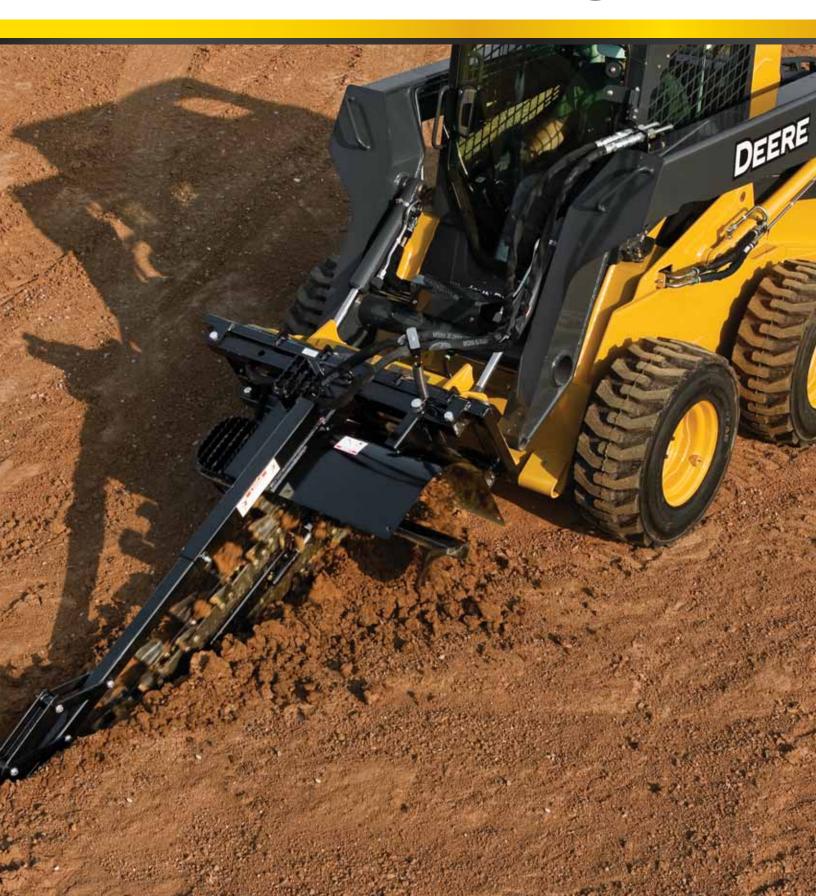

Trenchers

TR36B | TR48B | TR60B



- · Manual side shift conveniently allows trenching close to structures.
- Built-in skid shoe and indicators assist in maintaining digging control.
- Axle and wheel motor provide extreme durability. Heavy-duty planetary drive system eliminates the need for unreliable chain reduction.
- Spring-loaded boom reduces shocks to the hydraulic motor, skid steer or compact track loader, and operator.
- Trencher design allows easy entrance and exit from the skid steer or compact track loader.
- Standard heavy-duty crumber removes loose soil for increased productivity.
- Optional chain width and tooth configurations available.
- Like all Worksite Pro[™] attachments, these trenchers are optimized to work with John Deere D-Series Skid Steers and Compact Track Loaders, and are compatible with most competitive models. See your local John Deere skid steer dealer for details.

	TR36B	TR48B	TR60B
Hydraulic Oil Flow	57–167 L/min. (15–44 gpm)	57–167 L/min. (15–44 gpm)	102–167 L/min. (27–44 gpm)
Maximum Continuous	232 kg/cm³ (3,300 psi)	232 kg/cm³ (3,300 psi)	232 kg/cm³ (3,300 psi)
Operating Pressure			
Chain Type	2270 kg (50,000 lb.) rated double standard anti-back flex	2270 kg (50,000 lb.) rated double standard anti-back flex	2270 kg (50,000 lb.) rated double standard anti-back flex
Chain Pitch	51 mm (2 in.)	51 mm (2 in.)	51 mm (2 in.)
Boom Size	914 mm (36 in.)	1220 mm (48 in.)	1524 mm (60 in.)
Trench Width (standard)	152 mm (6 in.)	152 mm (6 in.)	152 mm (6 in.)
Spoil Auger Diameter (standard)	355 mm (14 in.)	355 mm (14 in.)	355 mm (14 in.)
Weight	516 kg (1,130 lb.)	535 kg (1,180 lb.)	606 kg (1,335 lb.)
Overall Length	1854 mm (73 in.)	2184 mm (86 in.)	2515 mm (99 in.)
Vehicle Compatibility	313, 315, 318D, 320D, 326D, 328D, and 332D Skid Steers; and CT315, 319D, 323D, 329D, and 333D Compact Track Loaders	313, 315, 318D, 320D, 326D, 328D, and 332D Skid Steers; and CT315, 319D, 323D, 329D, and 333D Compact Track Loaders	318D, 320D, 326D, 328D, and 332D Skid Steers; 323D, 329D, and 333D Compact Track Loaders



This literature has been compiled for worldwide circulation. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specifications, design, and price of products described in this literature without notice.



DKATRCWP Litho in U.S.A. (10-05) www.JohnDeere.com